



Optional one-sided support (OSS) 120°

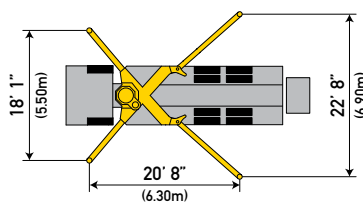

End hose not to be operated in caution area.

Photos and drawings are for illustrative purposes only.

Authorized Distributor



36Z-METER TRUCK-MOUNTED SPECIFICATIONS

Length	36' 5"	(11.09m)
Width	8' 2"	(2.50m)
Height	13' 3"	(4.04m)
Wheelbase	215"	(5,461mm)
Front axle weight	17,000 lbs	(7,711kg)
Rear axle weight	34,500 lbs	(15,650kg)
Approx. total weight	51,500 lbs	(23,360kg)

Based on Model MACK MRU 613 with .16H pump cell.

Weights are approximate and include pump, boom, truck, driver and some fuel.

Varies with options selected.

Dimensions will vary with different truck makes, models and specifications.

BOOM SPECIFICATIONS | Z-FOLD DESIGN

Height & Reach

Vertical reach	116' 10"	(35.60m)
Horizontal reach	103' 0"	(31.40m)
Reach from front of truck*	94' 10"	(28.90m)
Reach depth	78' 5"	(23.90m)
Unfolding height	27' 11"	(8.50m)

4-Section Boom

1st section articulation	104°	
2nd section articulation	180°	
3rd section articulation	253°	
4th section articulation	225°	
1st section length	27' 11"	(8.50m)
2nd section length	24' 11"	(7.60m)
3rd section length	24' 11"	(7.60m)
4th section length	25' 11"	(7.90m)

General Specs

Pipeline Size (ID) metric ends	5"	(125mm)
Rotation	365°	
End hose — length	10' 0"	(3.00m)
End hose — diameter	5"	(125mm)
Outrigger spread L - R — front	18' 1"	(5.50m)
hydraulically extend out & down		
Outrigger spread L - R — rear	22' 8"	(6.90m)
hydraulically swing out & extend down		

PUMP SPECIFICATIONS

	36Z.12H	36Z.16H
Output — rod side	124 yd ³ /hr (95m ³ /hr)	210 yd ³ /hr (160m ³ /hr)
— piston side	84 yd ³ /hr (64m ³ /hr)	146 yd ³ /hr (112m ³ /hr)
Pressure — rod side	1,233 psi (85 bar)	1,233 psi (85 bar)
— piston side	1,885 psi (130 bar)*	1,885 psi (130 bar)*
Material cylinder diameter	9" (230mm)	9" (230mm)
Stroke length	83" (2,100mm)	83" (2,100mm)
Maximum strokes per minute		
— rod side	18	31
— piston side	12	21
Volume control	0-Full	0-Full
Vibrator	Standard	Standard
Hard-chromed material cylinders	Standard	Standard
Hydraulic system	Free Flow	Free Flow
Hydraulic system pressure	5,075 psi (350 bar)	5,075 psi (350 bar)
Differential cylinder diameter	5.1" (130mm)	5.5" (140mm)
Rod diameter	3.1" (80mm)	3.1" (80mm)
Maximum size aggregate	2.5" (63mm)	2.5" (63mm)
Water tank— pedestal	185 gal (700L)	185 gal (700L)

Maximum theoretical values listed.

* Applies to units mounted on PMA stock truck — MACK MRU 613

• Standard delivery line system rated at max line pressure of 1,233 psi (85 bar)



Putzmeister

Putzmeister America, Inc. Phone (262) 886-3200
 1733 90th Street Toll-free (800) 884-7210
 Sturtevant, WI 53177 USA Fax (262) 884-6338

PutzmeisterAmerica.com

pmr@putzam.com